

Service Manual

STEP - 1

Multi-Scan Color TFT LCD Monitor

PanaFlat™ LC40

MODEL TX-D4L31-M/-U/-G/-NM

Chassis No. HL1

Chassis Family No.14HL1

Suffix of Each Model and Destination

-M	North America	(Power Cord : UL/CSA type	No. TSXA023 enclosed)
-U	U.K.	(Power Cord : U.K. type	No. TSXB4B3 enclosed)
-G	Other Europe and Asia	(Power Cord : VDE type	No. TSXB4B4 enclosed)



CONTENTS

SERVICE WARNING	1
SAFETY PRECAUTIONS.....	1
CAUTION FOR ADJUSTMENT AND REPAIR.....	1
INTRODUCTION	2
GENERAL DESCRIPTION OF LIQUID CRYSTAL DISPLAY (LCD) PANEL.....	4
GENERAL INFORMATION	7
SPECIFICATIONS.....	8
DIMENSIONS	22
DISASSEMBLY INSTRUCTIONS	23
CONTROL LOCATION.....	25
ADJUSTMENT AND CHECK PROCEDURE	27
ADJUSTMENT SOFTWARE.....	29
ADJUSTMENT PROCEDURE	30
TECHNICAL INFORMATION FOR DDC.....	31
TROUBLE SHOOTING HINTS.....	33
BLOCK DIAGRAM.....	36
CONDUCTOR VIEW	40
SCHEMATIC DIAGRAM.....	42
EXPLODED VIEW.....	49
REPLACEMENT PARTS LIST	50


Panasonic


© 1997 Matsushita Electric Co., Ltd.



All right reserved. Unauthorized copying and distribution is a violation of law.


IMPORTANT SAFETY NOTICE


The component identified by shading or international symbol Δ on the following schematic diagrams incorporate special features important for protection from X-Radiation, fire and electrical shock hazards. When servicing it is essential that only manufacturer's specified parts be used for those critical components.

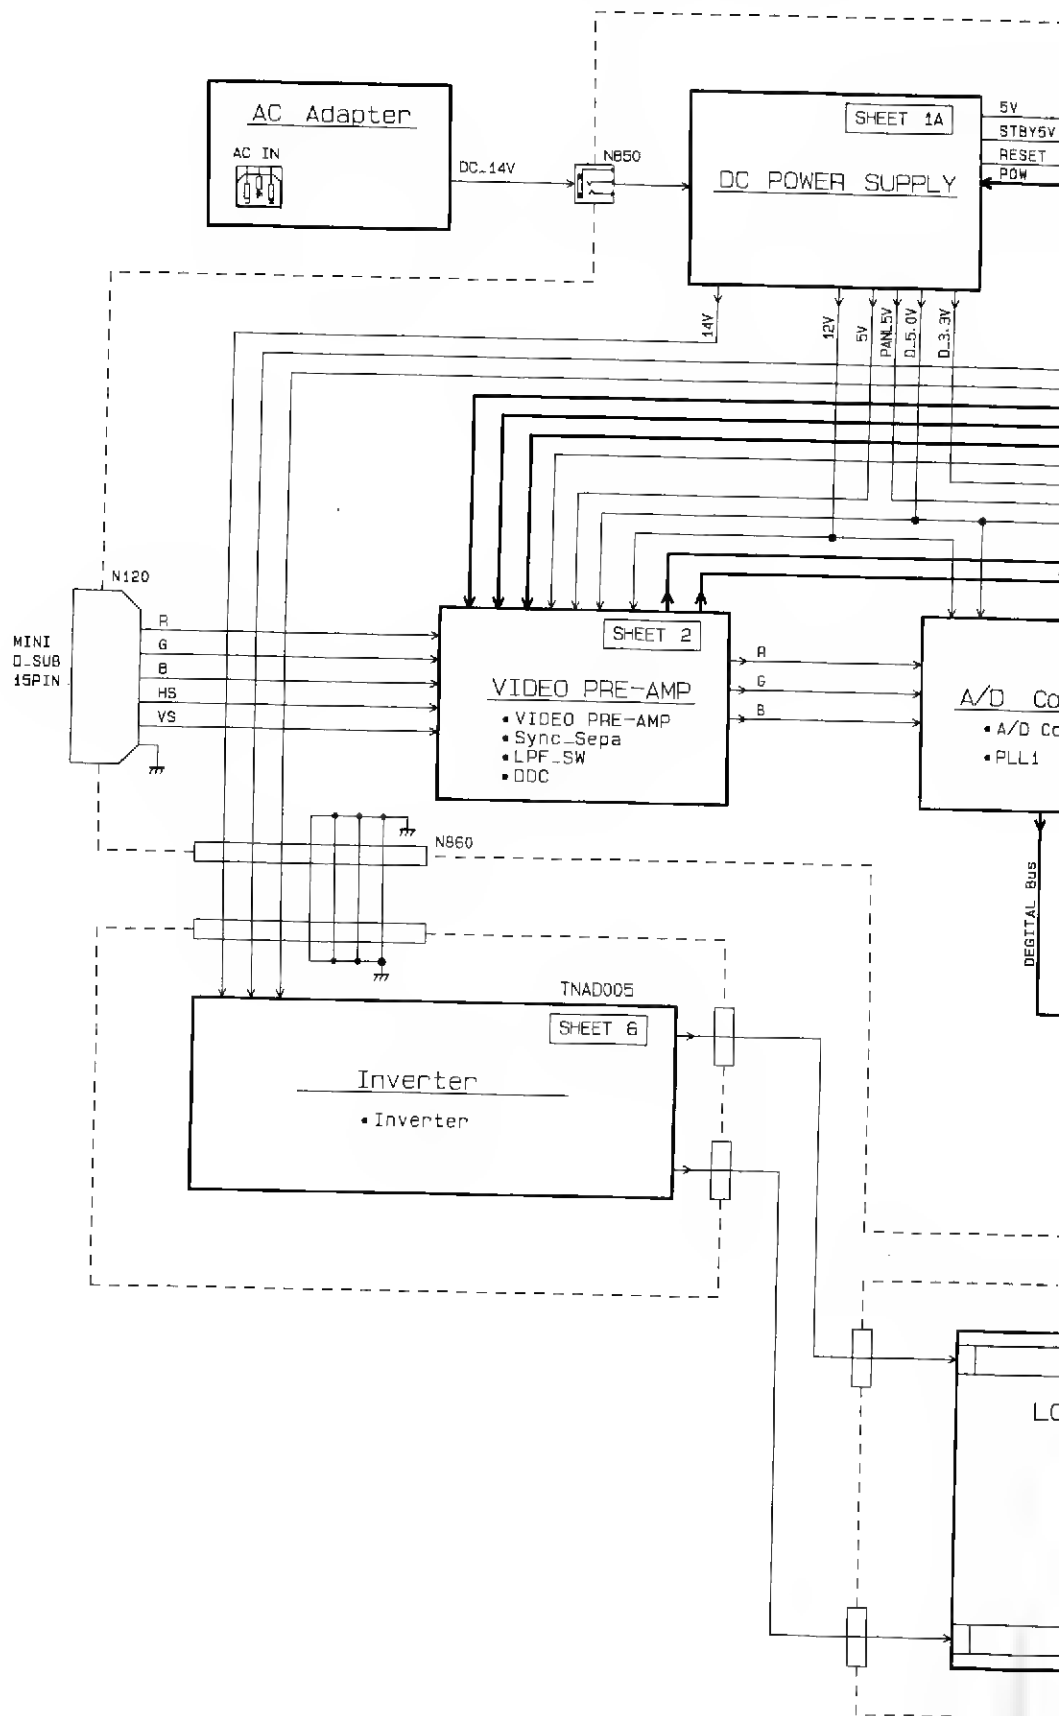


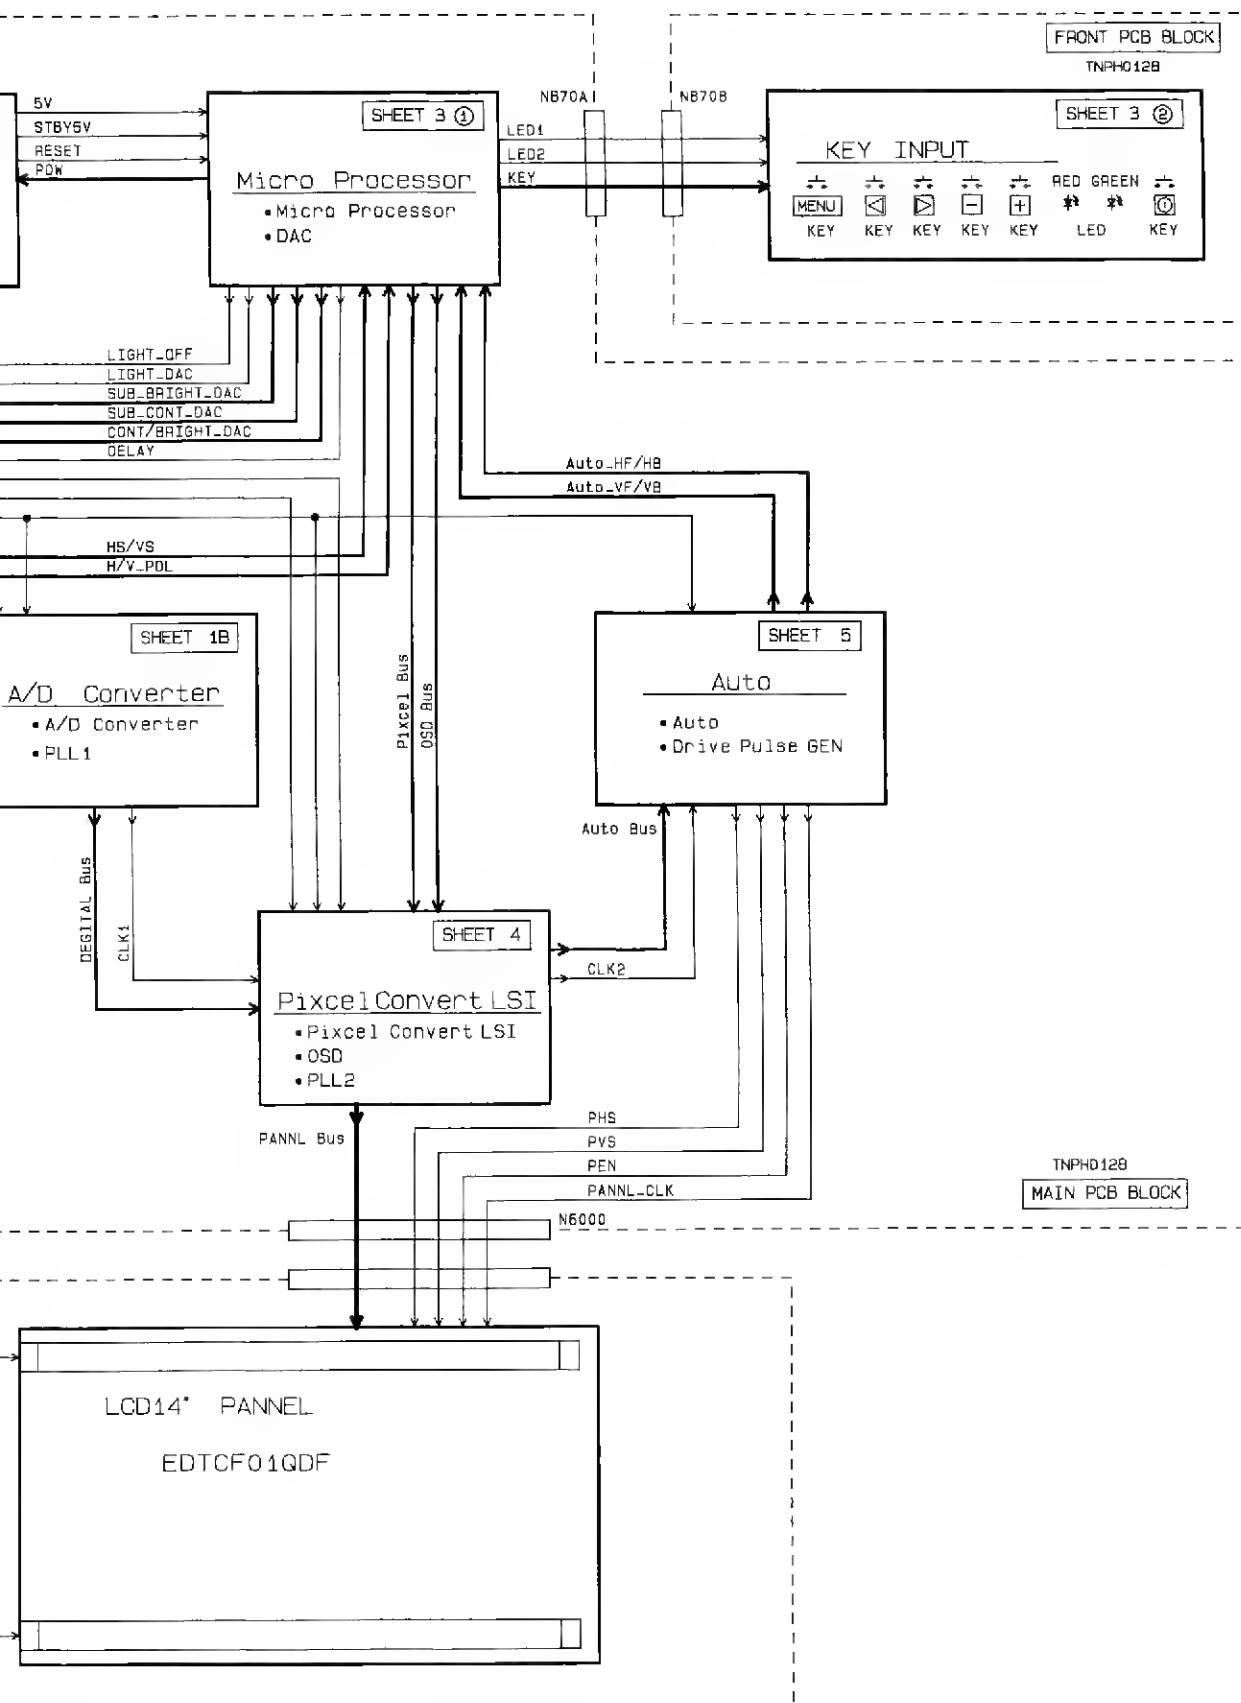


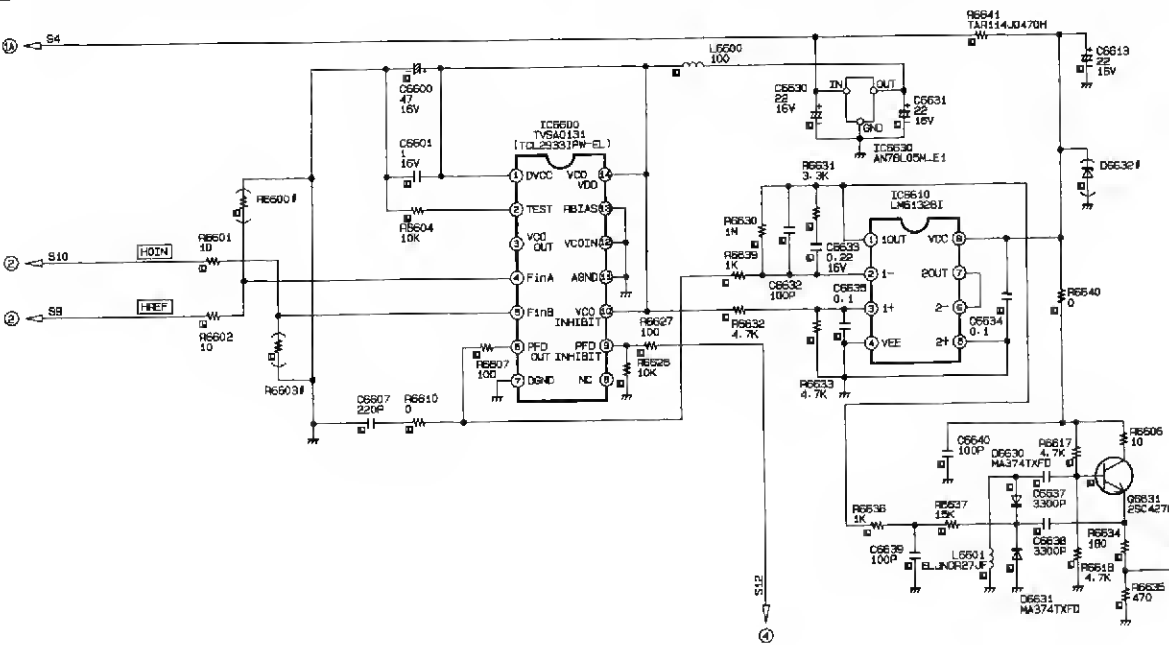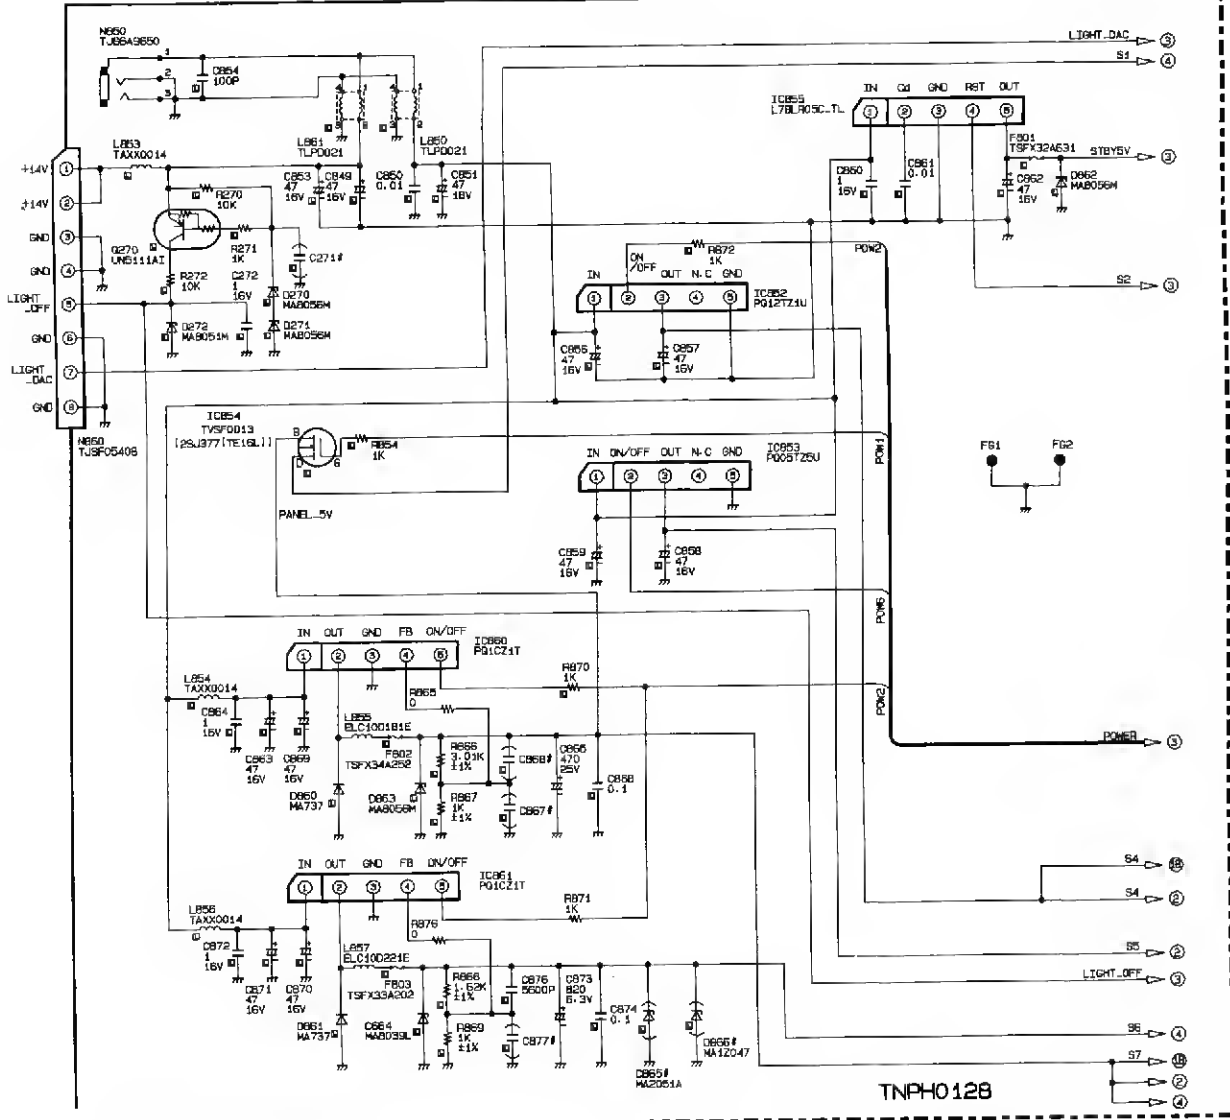


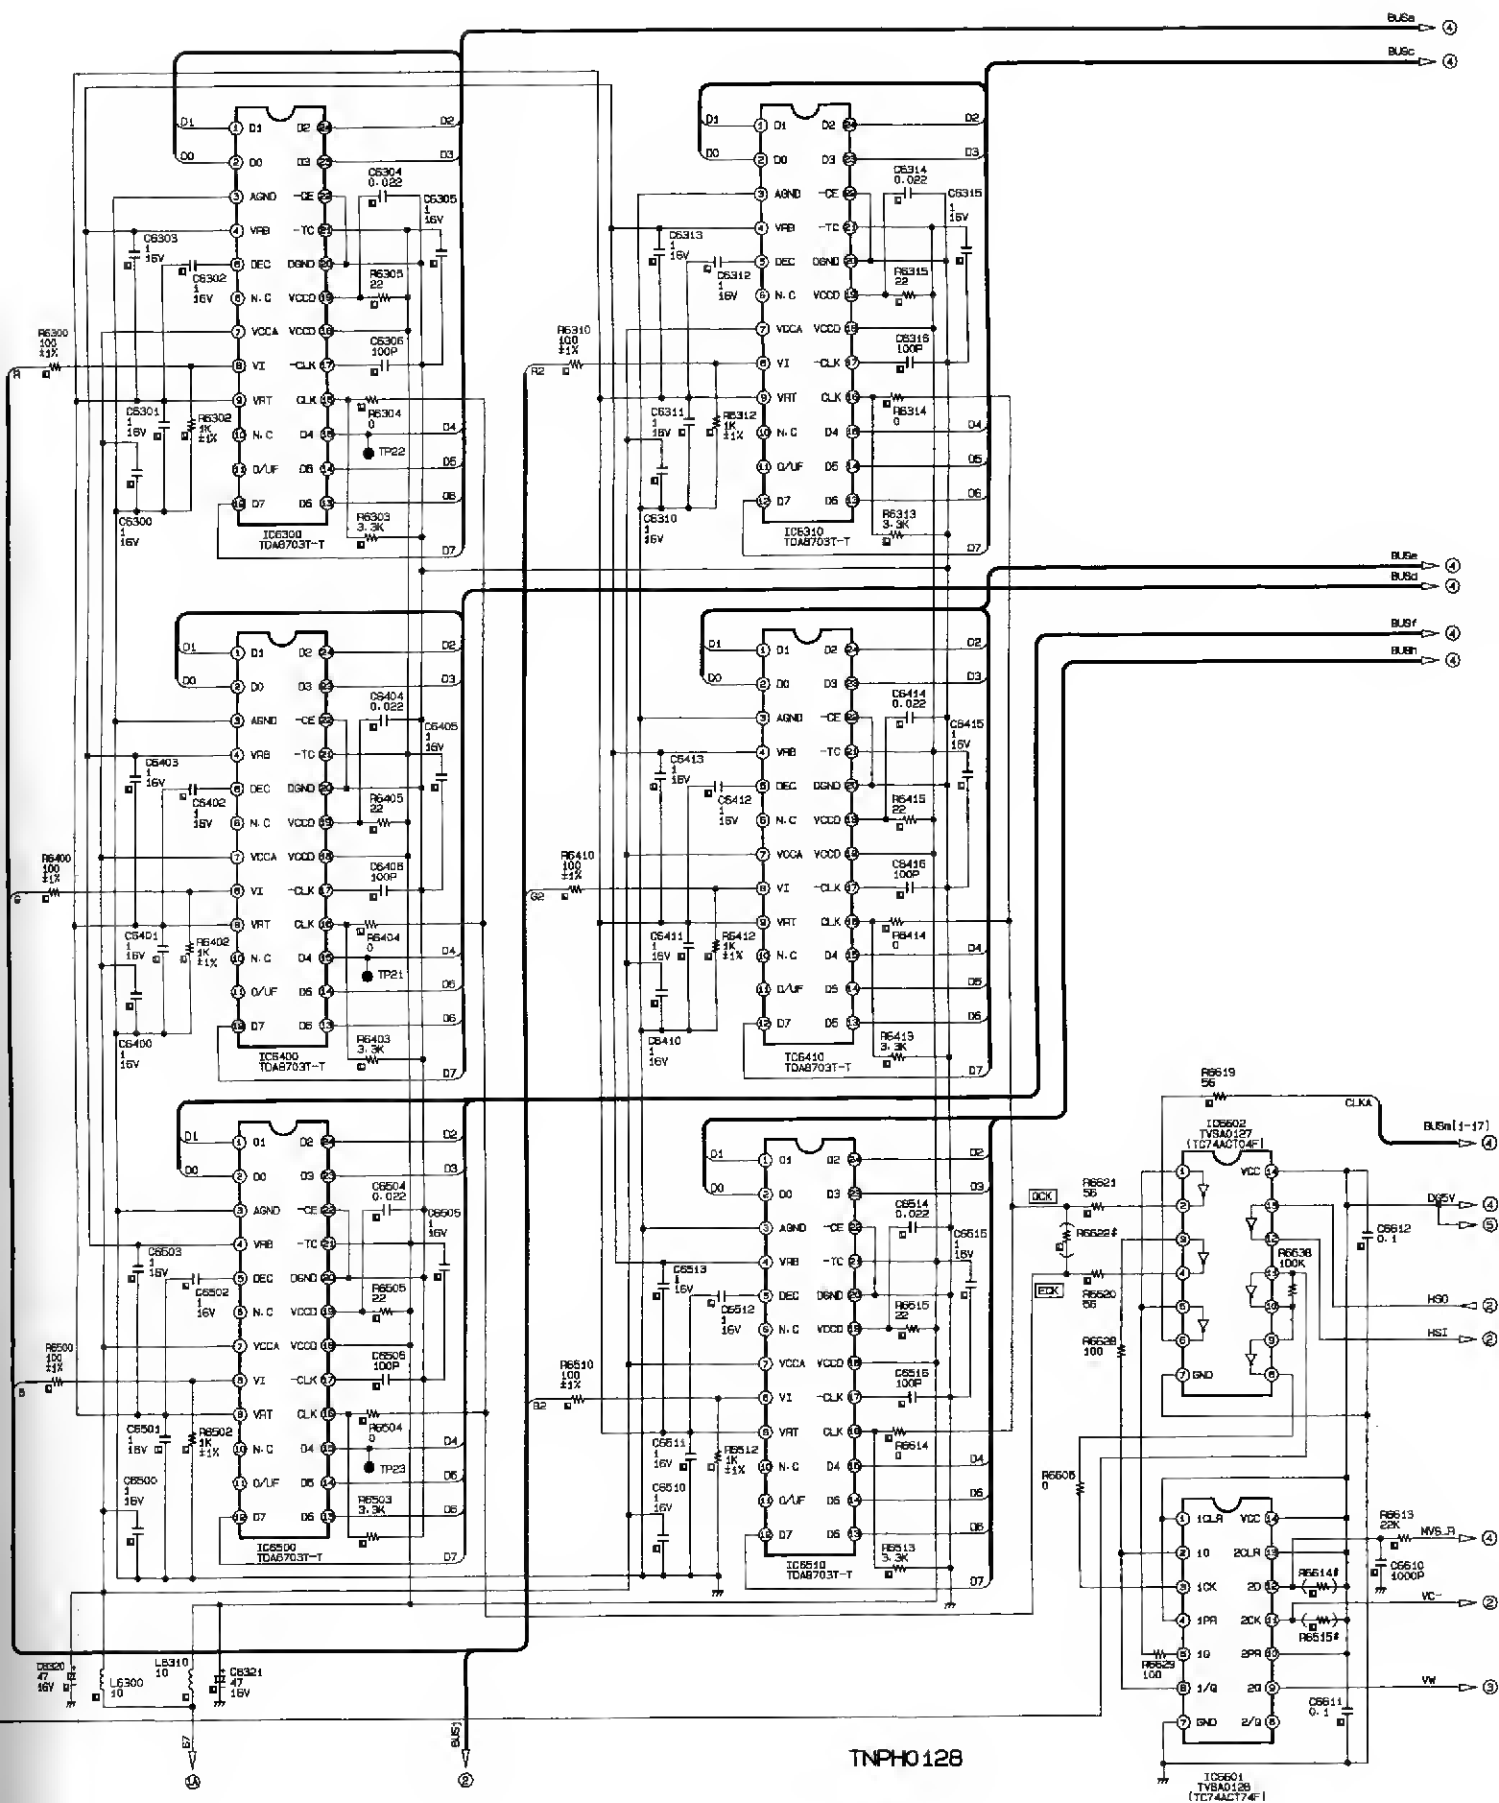

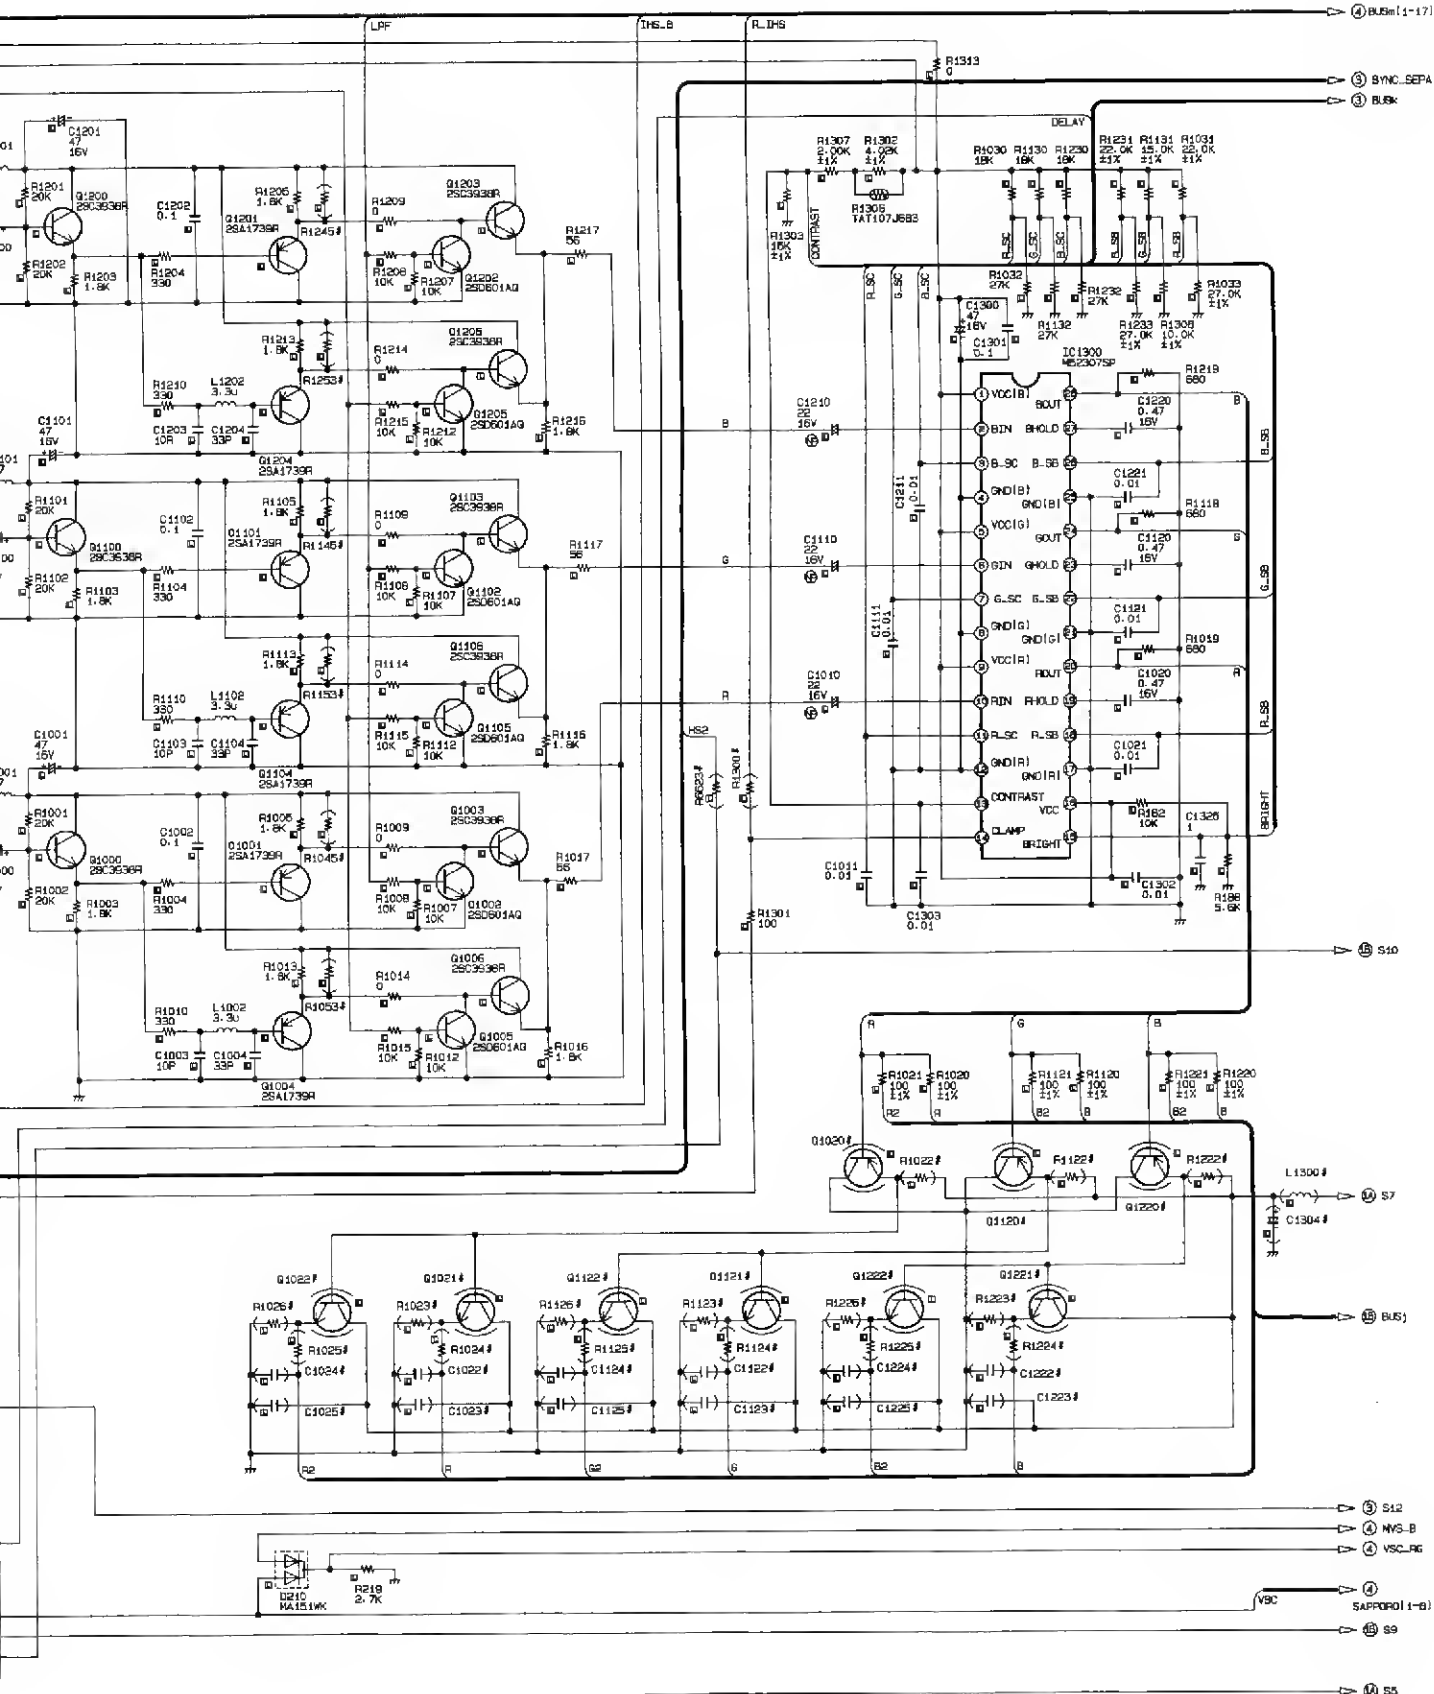





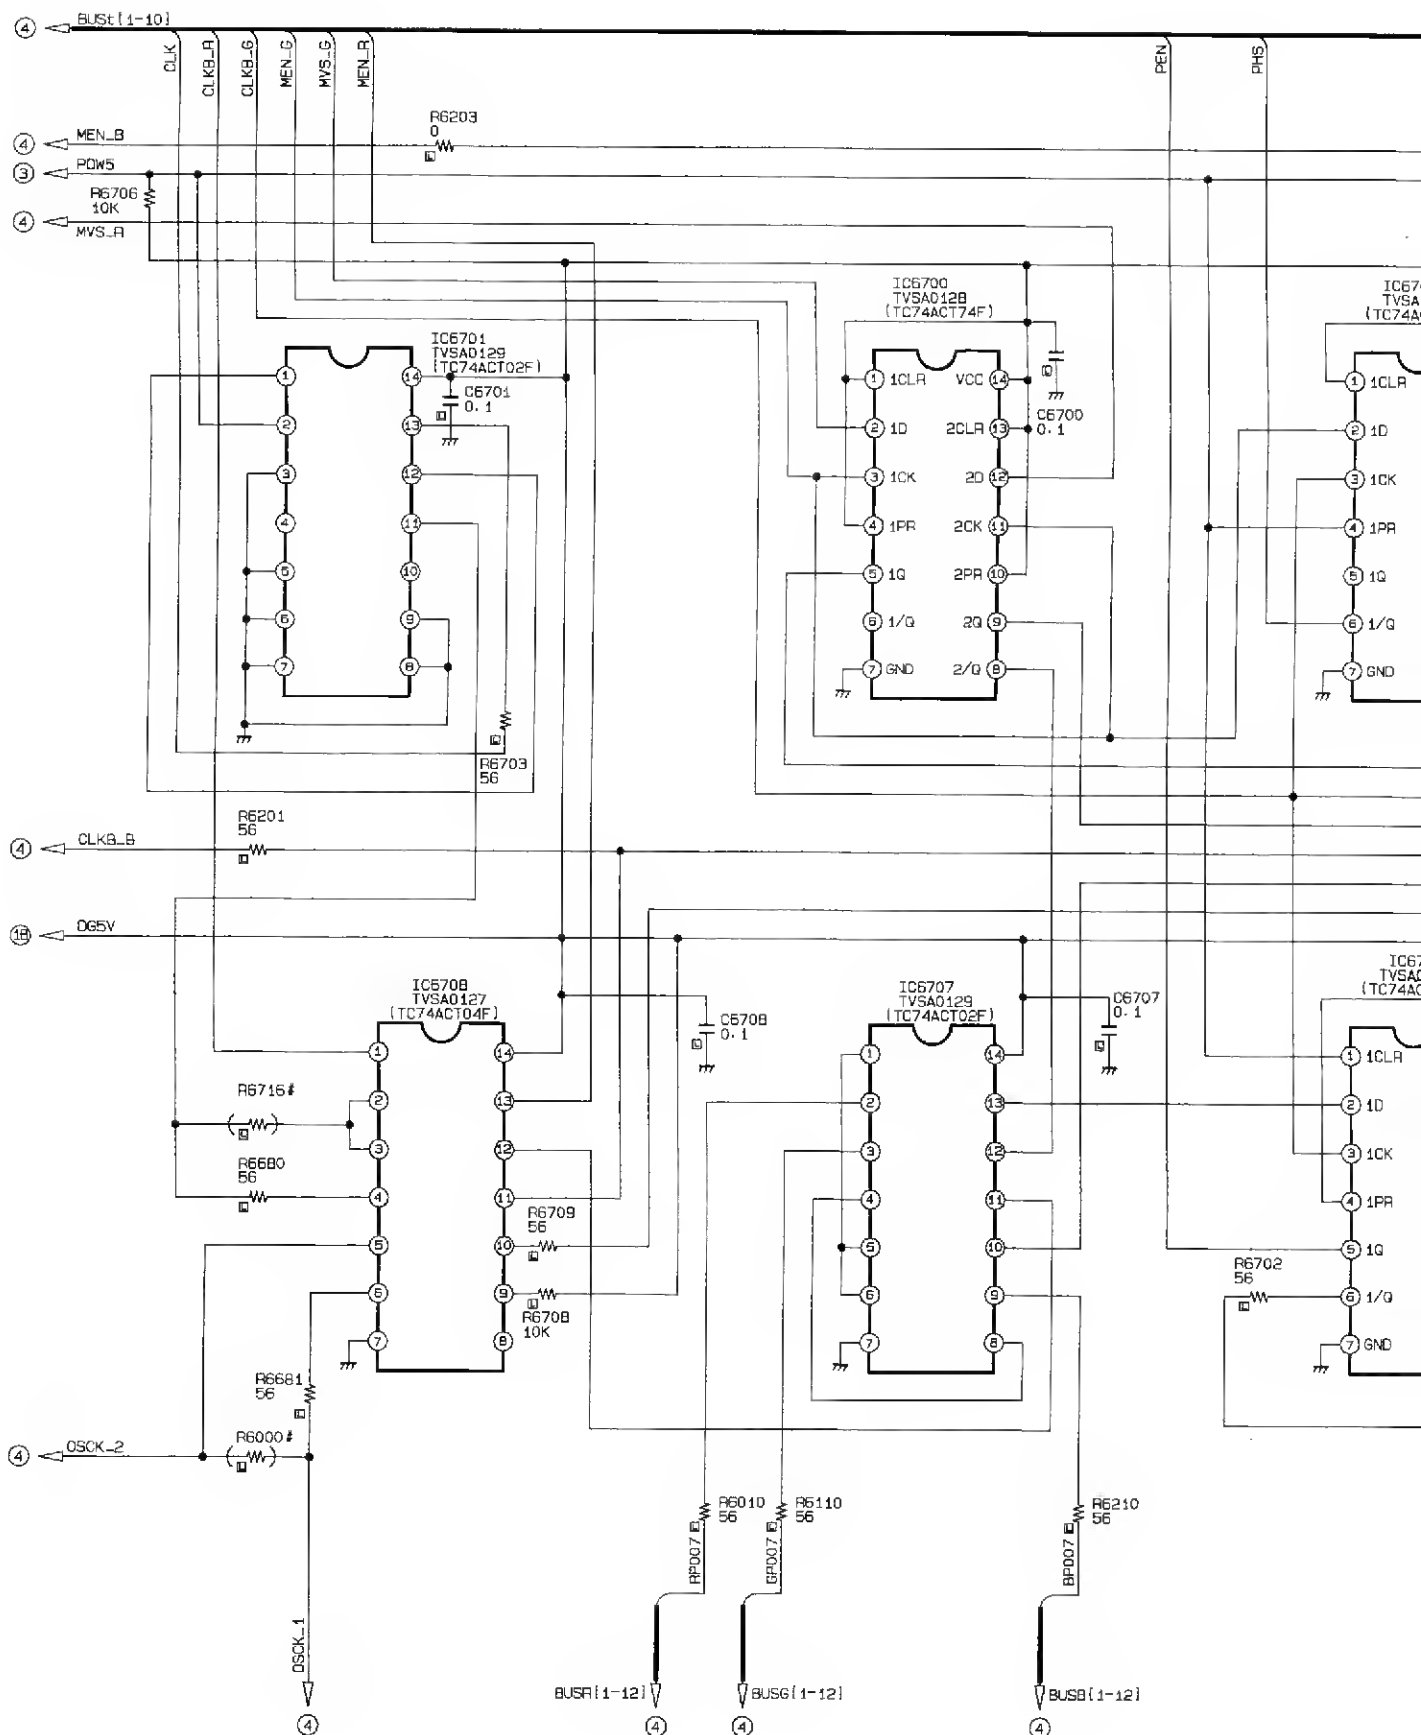

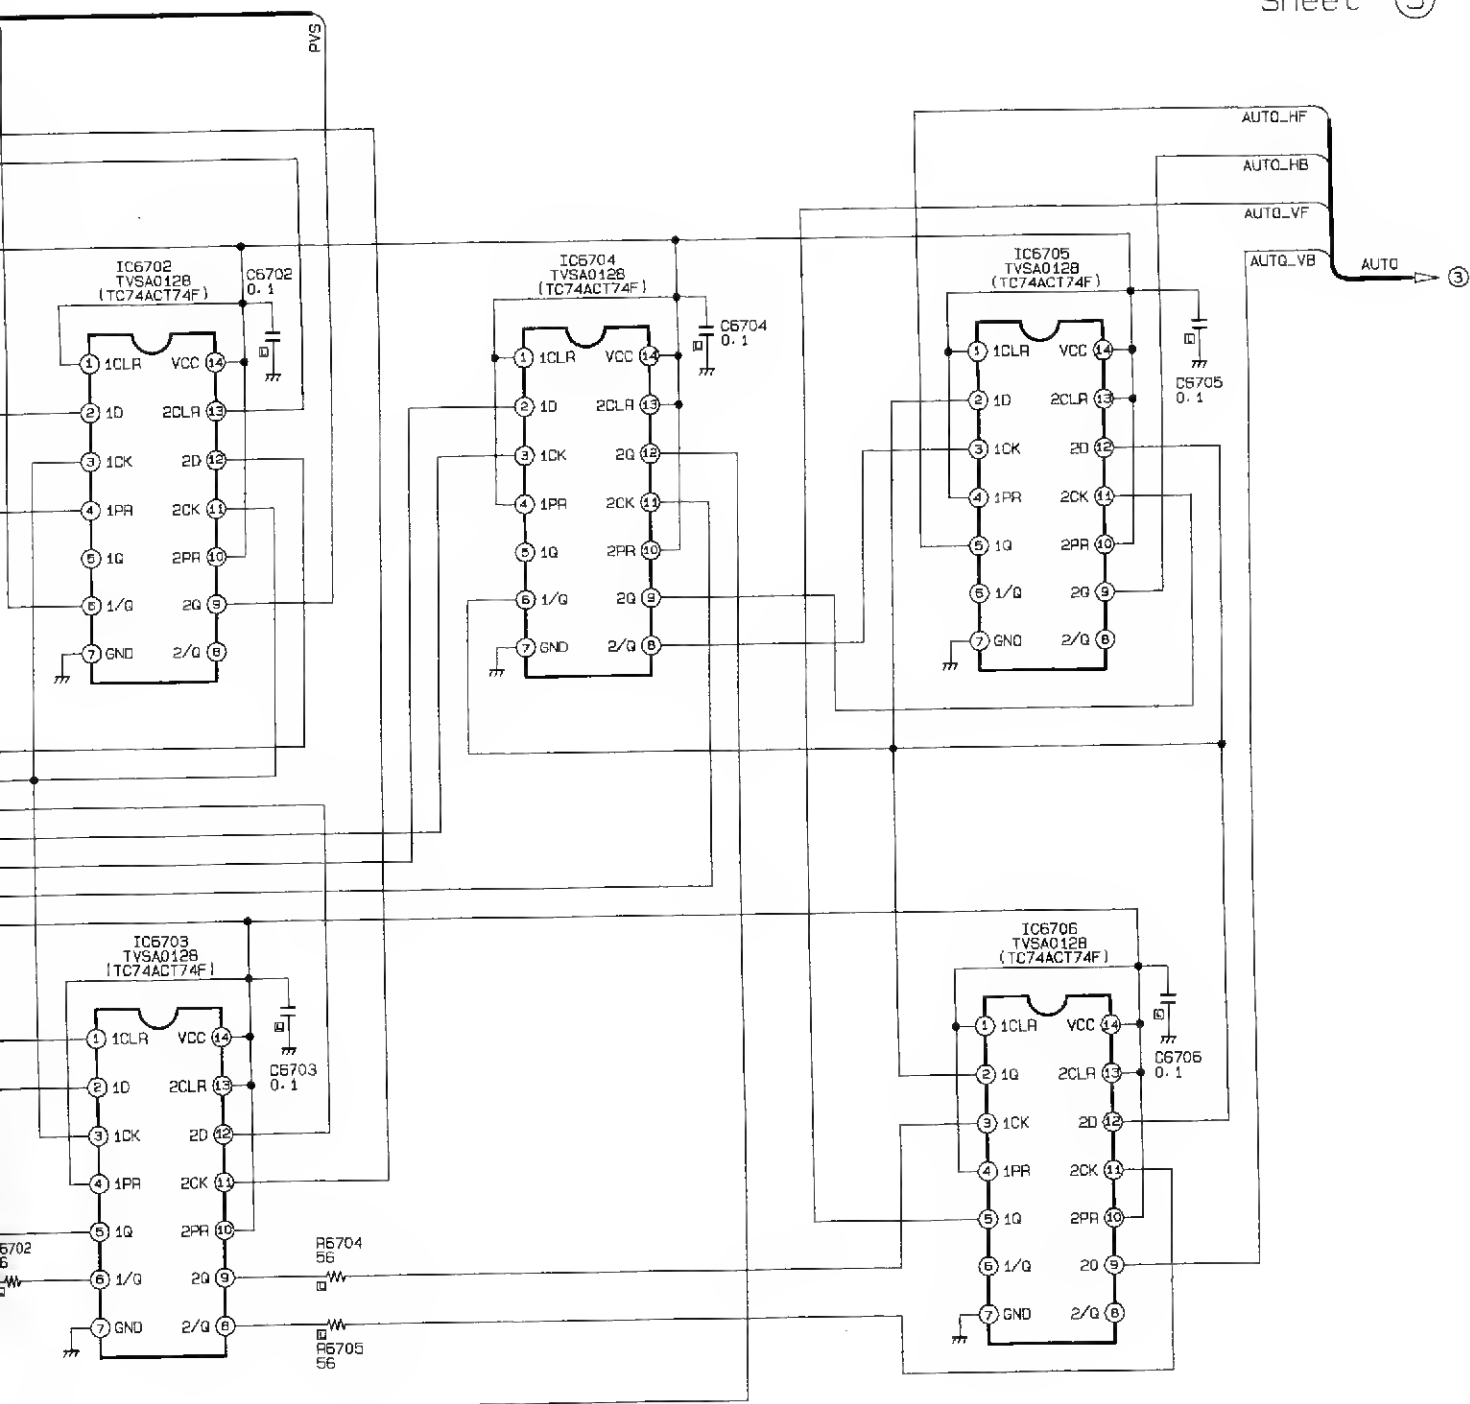

TNPH0128

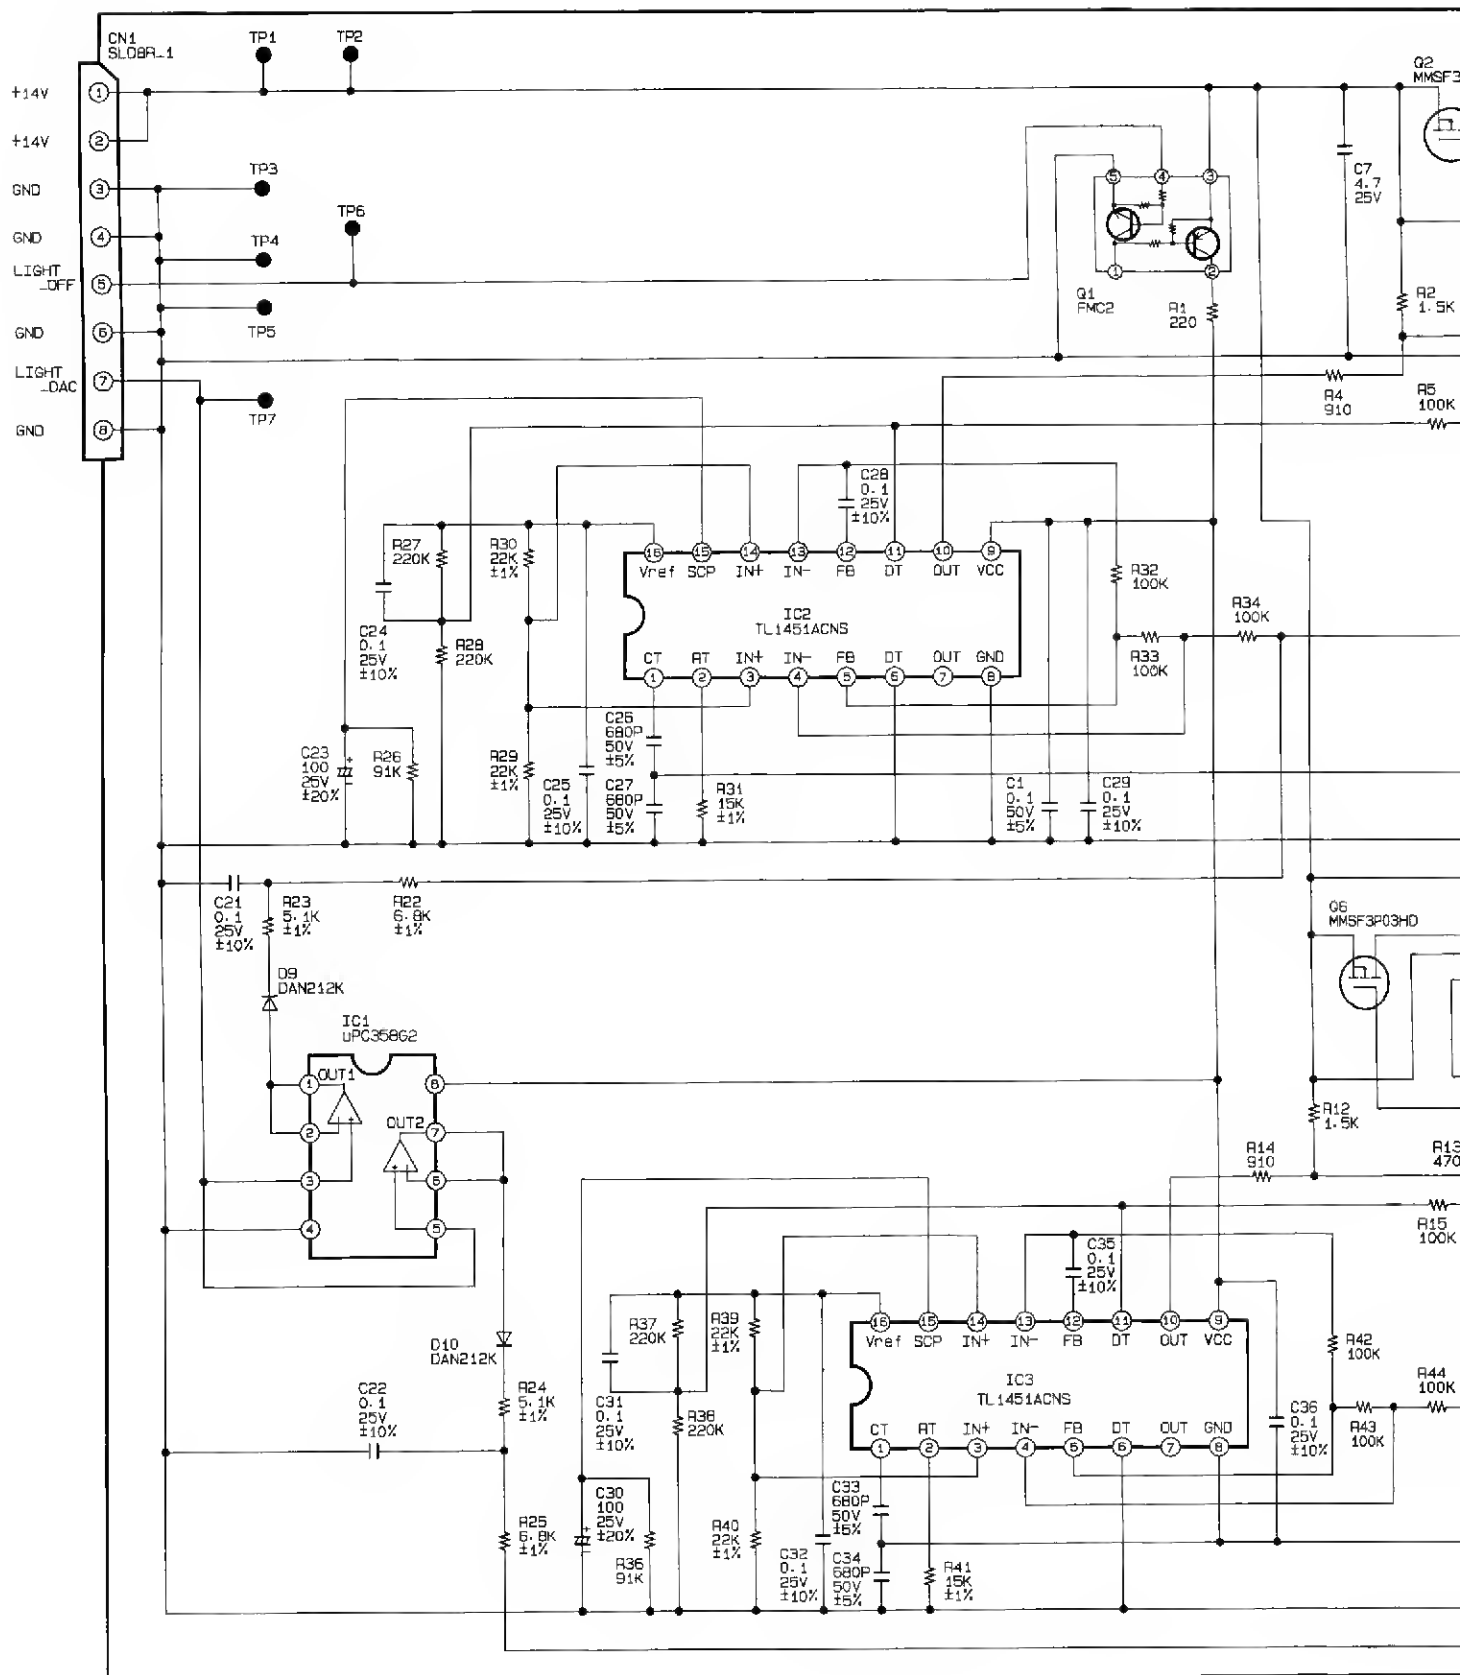

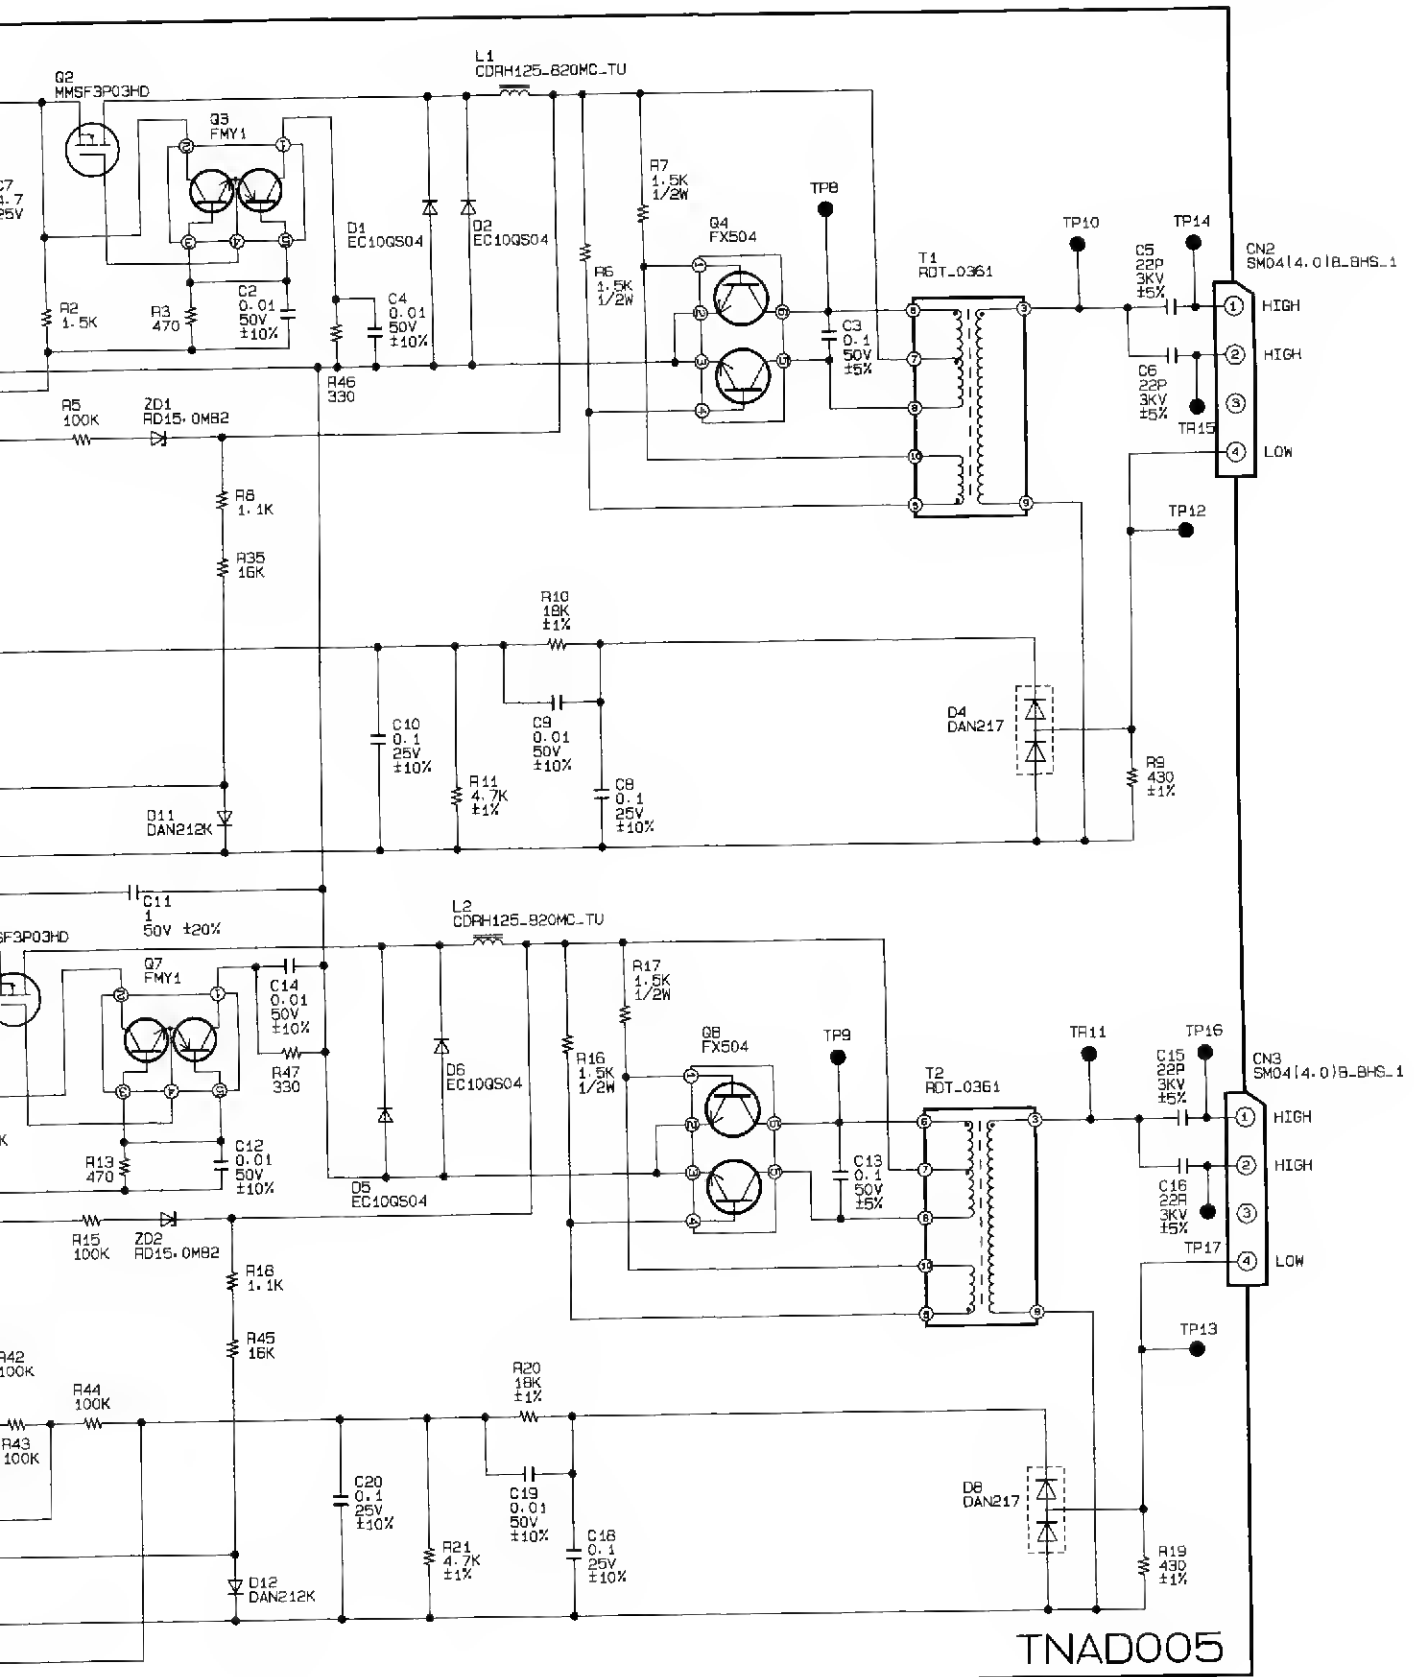

TNAD005